SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 712/60

SPECfp95 = 2.39

SPECfp_base95 = 2.39

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Jan-96	Hardware Avail: Jan-94	Software Avail: Feb-96

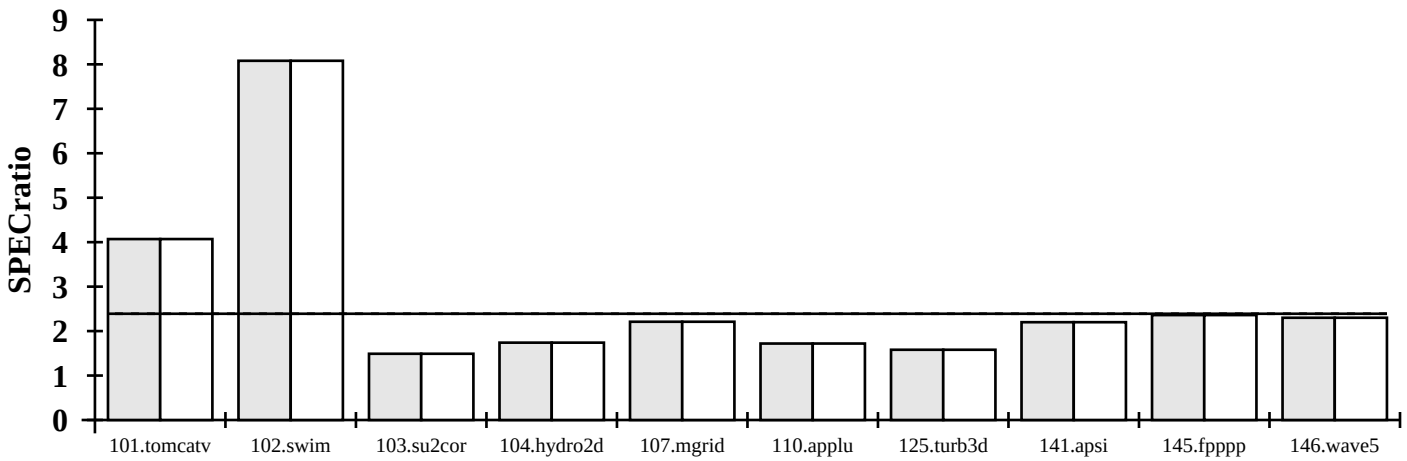

Hardware/Software Configuration for:
HP 9000 Series 700 Model 712/60

Hardware

Model Name:	HP 9000 Series 700 Model 712/60
CPU:	60 MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 HP C3325A 2 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.10
Compiler:	HP FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	908	4.07	908	4.07
102.swim	8600	1065	8.08	1065	8.08
103.su2cor	1400	940	1.49	940	1.49
104.hydro2d	2400	1376	1.74	1376	1.74
107.mgrid	2500	1129	2.21	1129	2.21
110.applu	2200	1278	1.72	1278	1.72
125.turb3d	4100	2602	1.58	2602	1.58
141.apsi	2100	954	2.20	954	2.20
145.fpppp	9600	4064	2.36	4064	2.36
146.wave5	3000	1302	2.30	1302	2.30
SPECfp_base95 (G. Mean)			2.39		
		SPECfp95 (G. Mean)			2.39

Notes/Tuning Information

```
BASE FLAGS:
All: +Oall +Onofastaccess
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.
```