SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Dell Computer Corporation
Dell Dimension XPS Pro180n (180MHz)

SPECint95 = 7.28

SPECint_base95 = 7.28

SPEC license # 14	Tested By: Intel	Test Date: May-96	Hardware Avail: Jun-96	Software Avail: Mar-96

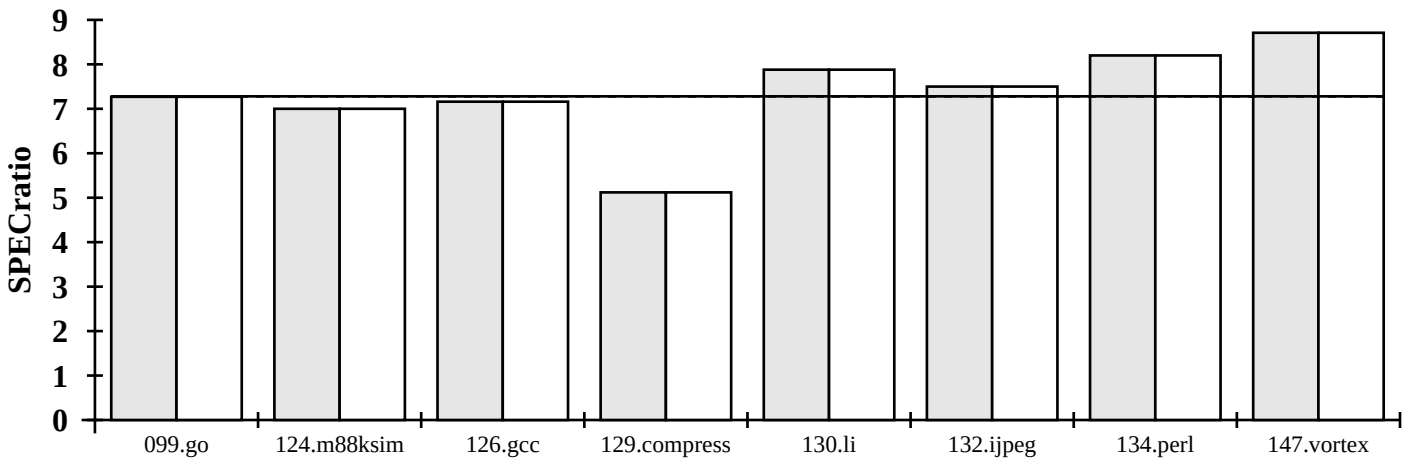

Hardware/Software Configuration for:
Dell Dimension XPS Pro180n (180MHz)

Hardware

Model Name:	XPS
CPU:	180MHz Pentium Pro processor
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	8KBI+8KBD
Secondary Cache:	256KB(I+D)
Other Cache:	None
Memory:	64MB(EDO)
Disk Subsystem:	1MB IDE Quantum Fireball
Other Hardware:	Integrated EIDE disk controller

Software

Operating System:	UnixWare 2.0, UnixWare SDK
Compiler:	Intel C Reference Compiler V2.3
File System:	UFS
System State:	Single User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	633	7.27	633	7.27
124.m88ksim	1900	271	7.00	271	7.00
126.gcc	1700	238	7.16	238	7.16
129.compress	1800	351	5.12	351	5.12
130.li	1900	241	7.88	241	7.88
132.ijpeg	2400	320	7.50	320	7.50
134.perl	1900	232	8.20	232	8.20
147.vortex	2700	310	8.71	310	8.71
SPECint_base95 (G. Mean)			7.28		
		SPECint95 (G. Mean)			7.28

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV  126: -lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org

-- Prepared By: --