SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 735/99

SPECint_rate95 = 29.4

SPECint_base_rate95 = 29.4

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Dec-92	Software Avail: Aug-95

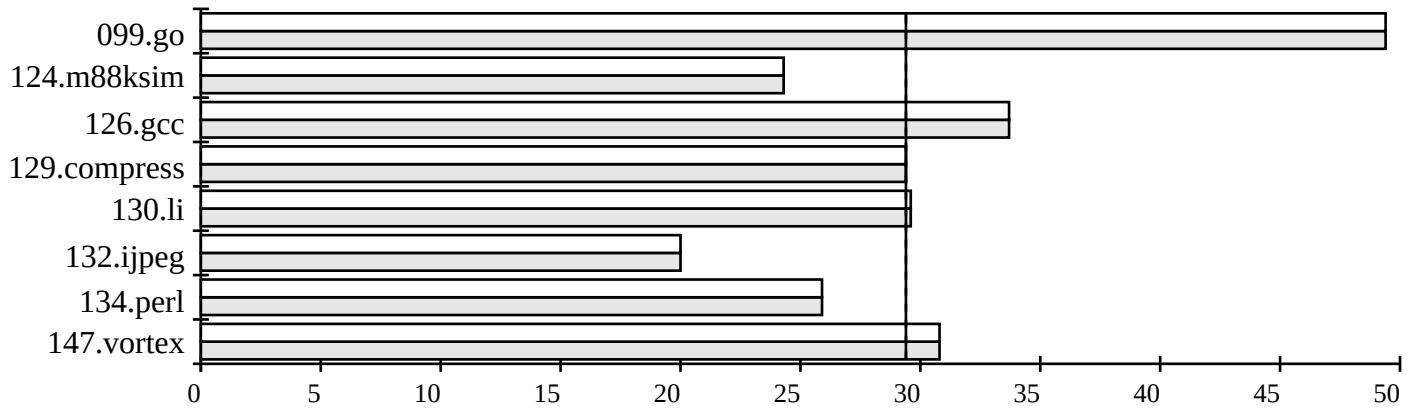

Hardware/Software Configuration for:
HP 9000 Series 700 Model 735/99

Hardware

Model Name:	HP 9000 Series 700 Model 735/99
CPU:	99 MHz PA-RISC 7100
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	839	49.4	1	839	49.4
124.m88ksim	1	703	24.3	1	703	24.3
126.gcc	1	454	33.7	1	454	33.7
129.compress	1	551	29.4	1	551	29.4
130.li	1	578	29.6	1	578	29.6
132.ijpeg	1	1080	20.0	1	1080	20.0
134.perl	1	660	25.9	1	660	25.9
147.vortex	1	789	30.8	1	789	30.8
SPECint_base_rate95 (G. Mean)			29.4			
SPECint_rate95 (G. Mean)						29.4

Notes/Tuning Information

```
Portability:  126.gcc: -DUSG
Linker Flags:  -Wl,-aarchive
Baseline Flags:  +P +Oall +Onoregionsched
+P indicates feedback directed optimization was used.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org