SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP SPP1600

SPECfp_rate95	=	383
SPECfp_rate_base95	=	383

SPEC license # 3	Tested By: HP Richardson, Tx	Test Date: May-96	Hardware Avail: Jun-96	Software Avail: Jun-96

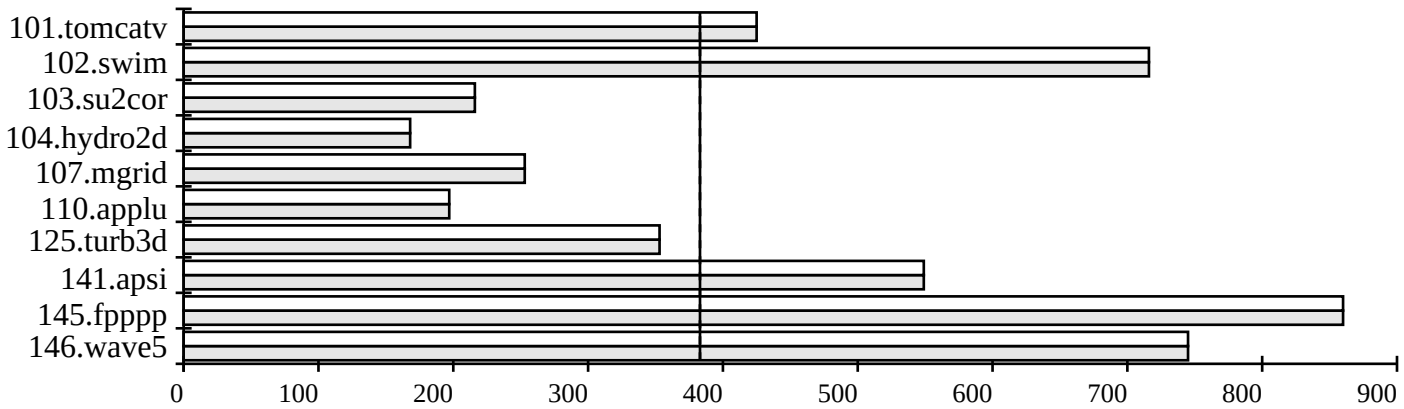

Hardware/Software Configuration for:
HP SPP1600

Hardware

Model Name:	HP SPP1600 CD
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	8
Primary Cache:	1MB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	2GB
Disk Subsystem:	6 x 1.5GB
Other Hardware:	None

Software

Operating System:	SPP-UX 4.0
Compiler:	HP-UX f77 941221 B3906AA 10.00
File System:	SPP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	8	627	425	8	627	425
102.swim	8	865	716	8	865	716
103.su2cor	8	467	216	8	467	216
104.hydro2d	8	1026	168	8	1026	168
107.mgrid	8	711	253	8	711	253
110.applu	8	804	197	8	804	197
125.turb3d	8	837	353	8	837	353
141.apsi	8	275	549	8	275	549
145.fpppp	8	804	860	8	804	860
146.wave5	8	290	745	8	290	745
SPECfp_rate_base95 (G. Mean)			383			
SPECfp_rate95 (G. Mean)						383

Notes/Tuning Information

```
BASE FLAGS:
All: +Oall +Onofastaccess +DAK400 -Wl,-aarchive

PEAK FLAGS:
Same as BASE FLAGS.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org

--

Prepared By: HP Richardson, Tx